

P1 1175298

REC'D 01 JUN 2004

WIPO

PCT

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME;

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

May 26, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 10/746,452

FILING DATE: December 24, 2003

RELATED PCT APPLICATION NUMBER: PCT/US04/08909

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



L. Edelen

L. EDELEN
Certifying Officer

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

PATENT APPLICATION SERIAL NO. _____

U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE
FEE RECORD SHEET

01/06/2004 WASFAW1 00000056 500815 10746452

01 FC:2001	385.00 DA
02 FC:2202	1089.00 DA
03 FC:2203	145.00 DA

PTO-1556
(5/87)

Please type a plus sign (+) inside this box →



16523 U.S. PTO
122403

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

PTO/SB/05 (05-1)
Approved for use through 04/30/2003. OMB 0551-06
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No.

CRMD-002

First Inventor

NIKOLCHEV, JULIAN

Title

MULTIPLE JOINT IMPLANT DELIVERY SYSTEMS FOR
SEQUENTIALLY-CONTROLLED IMPLANT DEPLOYMENT

Express Mail Label No.

EV 405 279 486 US

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

SEE MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Commissioner for Patents
Mail Stop Patent Application
P.O. Box 1450
Alexandria, VA 22313-1450

1. ☒ Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Applicant claims small entity status.
See 37 CFR 1.27.
3. ☒ Specification [Total Pages: 39]
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
4. ☒ Drawing(s) (35 U.S.C. 113) [Total Pages: 13]
5. Oath or Declaration [Total Pages: 1]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 18 completed)
 - c. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s)
Named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
6. ☒ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. ☐ CD-ROM or CD-R (2 copies); or
 - ii. ☐ paper
 - c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & documents(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
13. ☒ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Nonpublication Request under 35 U.S.C. 122
(b)(2)(B)(i). Applicant must attach form PTO/SB/35 or its equivalent.
17. ☐ Other:

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment or in an Application Data Sheet under 37 CFR 1.76:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: 60/458,323 filed 3/26/2003

Prior application information:

Examiner: _____ Group Art Unit: _____

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label




or ☐ Correspondence address below

Name	BOZICEVIC, FIELD & FRANCIS LLP			
Address	200 Middlefield Road, Suite 200			
City	Menlo Park	State	California	Zip Code 94025
Country	United States of America	Telephone	(650) 327-3400	Fax (650) 327-3231
Name	Carol M. LaSalle	Registration No. (Attorney/Agent)	39,740	
Signature		Date	December 24, 2003	

This collection of information is required by 37 CFR 1.53(b). The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS THIS ADDRESS. SEND TO: Mail Stop Patent Application, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

If you need assistance in completing this form, call 1-800-PTO-9189 and select option 2.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2004				Complete If Known																																																																																																																																																																																			
Effective 10/01/2003. Patent fees are subject to annual revision.				Application Number	To Be Assigned																																																																																																																																																																																		
				Filing Date	Herewith																																																																																																																																																																																		
				First Named Inventor	NIKOLCHEV, JULIAN																																																																																																																																																																																		
				Examiner Name	To Be Assigned																																																																																																																																																																																		
				Art Unit	To Be Assigned																																																																																																																																																																																		
				Attorney Docket No.	CRMD-002																																																																																																																																																																																		
<input checked="" type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27																																																																																																																																																																																							
TOTAL AMOUNT OF PAYMENT		(\$)		655.00																																																																																																																																																																																			
METHOD OF PAYMENT (check all that apply)				FEE CALCULATION (continued)																																																																																																																																																																																			
<input type="checkbox"/> Check <input type="checkbox"/> Credit Card <input type="checkbox"/> Money Order <input type="checkbox"/> Other <input type="checkbox"/> None				3. ADDITIONAL FEES <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>1051</td><td>130</td><td>2051</td><td>65</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>1052</td><td>50</td><td>2052</td><td>25</td><td>Surcharge - late provisional filing fee or cover sheet</td><td></td></tr> <tr><td>1053</td><td>130</td><td>1053</td><td>130</td><td>Non-English specification</td><td></td></tr> <tr><td>1812</td><td>2,520</td><td>1812</td><td>2,520</td><td>For filing a request for <i>ex parte</i> reexamination</td><td></td></tr> <tr><td>1804</td><td>920*</td><td>1804</td><td>920*</td><td>Requesting publication of SIR prior to Examination action</td><td></td></tr> <tr><td>1805</td><td>1,840*</td><td>1805</td><td>1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>1251</td><td>110</td><td>2251</td><td>55</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>1252</td><td>420</td><td>2252</td><td>210</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>1253</td><td>950</td><td>2253</td><td>475</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>1254</td><td>1,480</td><td>2254</td><td>740</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>1255</td><td>2,010</td><td>2255</td><td>1,005</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>1401</td><td>330</td><td>2401</td><td>165</td><td>Notice of Appeal</td><td></td></tr> <tr><td>1402</td><td>330</td><td>2402</td><td>165</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>1403</td><td>290</td><td>2403</td><td>145</td><td>Request for oral hearing</td><td></td></tr> <tr><td>1451</td><td>1,510</td><td>1451</td><td>1,510</td><td>Petition to Institute a public use proceeding</td><td></td></tr> <tr><td>1452</td><td>110</td><td>2452</td><td>55</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>1453</td><td>1,330</td><td>2453</td><td>665</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>1501</td><td>1,330</td><td>2501</td><td>665</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>1502</td><td>480</td><td>2502</td><td>240</td><td>Design issue fee</td><td></td></tr> <tr><td>1503</td><td>640</td><td>2503</td><td>320</td><td>Plant issue fee</td><td></td></tr> <tr><td>1408</td><td>130</td><td>1460</td><td>130</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>1807</td><td>50</td><td>1807</td><td>50</td><td>Processing fee under 37 CFR 1.17(a)</td><td></td></tr> <tr><td>1808</td><td>180</td><td>1808</td><td>180</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>8021</td><td>40</td><td>8021</td><td>40</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr> <tr><td>1809</td><td>770</td><td>2809</td><td>385</td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr> <tr><td>1810</td><td>770</td><td>2810</td><td>385</td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr> <tr><td>1801</td><td>770</td><td>2801</td><td>385</td><td>Request for Continued Examination (RCE)</td><td></td></tr> <tr><td>1802</td><td>900</td><td>1802</td><td>900</td><td>Request for expedited examination of a design application</td><td></td></tr> </tbody> </table>		Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	1051	130	2051	65	Surcharge - late filing fee or oath		1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet		1053	130	1053	130	Non-English specification		1812	2,520	1812	2,520	For filing a request for <i>ex parte</i> reexamination		1804	920*	1804	920*	Requesting publication of SIR prior to Examination action		1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action		1251	110	2251	55	Extension for reply within first month		1252	420	2252	210	Extension for reply within second month		1253	950	2253	475	Extension for reply within third month		1254	1,480	2254	740	Extension for reply within fourth month		1255	2,010	2255	1,005	Extension for reply within fifth month		1401	330	2401	165	Notice of Appeal		1402	330	2402	165	Filing a brief in support of an appeal		1403	290	2403	145	Request for oral hearing		1451	1,510	1451	1,510	Petition to Institute a public use proceeding		1452	110	2452	55	Petition to revive - unavoidable		1453	1,330	2453	665	Petition to revive - unintentional		1501	1,330	2501	665	Utility issue fee (or reissue)		1502	480	2502	240	Design issue fee		1503	640	2503	320	Plant issue fee		1408	130	1460	130	Petitions to the Commissioner		1807	50	1807	50	Processing fee under 37 CFR 1.17(a)		1808	180	1808	180	Submission of Information Disclosure Stmt		8021	40	8021	40	Recording each patent assignment per property (times number of properties)		1809	770	2809	385	Filing a submission after final rejection (37 CFR § 1.129(a))		1810	770	2810	385	For each additional invention to be examined (37 CFR § 1.129(b))		1801	770	2801	385	Request for Continued Examination (RCE)		1802	900	1802	900	Request for expedited examination of a design application	
Large Entity		Small Entity				Fee Description	Fee Paid																																																																																																																																																																																
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																				
1051	130	2051	65			Surcharge - late filing fee or oath																																																																																																																																																																																	
1052	50	2052	25	Surcharge - late provisional filing fee or cover sheet																																																																																																																																																																																			
1053	130	1053	130	Non-English specification																																																																																																																																																																																			
1812	2,520	1812	2,520	For filing a request for <i>ex parte</i> reexamination																																																																																																																																																																																			
1804	920*	1804	920*	Requesting publication of SIR prior to Examination action																																																																																																																																																																																			
1805	1,840*	1805	1,840*	Requesting publication of SIR after Examiner action																																																																																																																																																																																			
1251	110	2251	55	Extension for reply within first month																																																																																																																																																																																			
1252	420	2252	210	Extension for reply within second month																																																																																																																																																																																			
1253	950	2253	475	Extension for reply within third month																																																																																																																																																																																			
1254	1,480	2254	740	Extension for reply within fourth month																																																																																																																																																																																			
1255	2,010	2255	1,005	Extension for reply within fifth month																																																																																																																																																																																			
1401	330	2401	165	Notice of Appeal																																																																																																																																																																																			
1402	330	2402	165	Filing a brief in support of an appeal																																																																																																																																																																																			
1403	290	2403	145	Request for oral hearing																																																																																																																																																																																			
1451	1,510	1451	1,510	Petition to Institute a public use proceeding																																																																																																																																																																																			
1452	110	2452	55	Petition to revive - unavoidable																																																																																																																																																																																			
1453	1,330	2453	665	Petition to revive - unintentional																																																																																																																																																																																			
1501	1,330	2501	665	Utility issue fee (or reissue)																																																																																																																																																																																			
1502	480	2502	240	Design issue fee																																																																																																																																																																																			
1503	640	2503	320	Plant issue fee																																																																																																																																																																																			
1408	130	1460	130	Petitions to the Commissioner																																																																																																																																																																																			
1807	50	1807	50	Processing fee under 37 CFR 1.17(a)																																																																																																																																																																																			
1808	180	1808	180	Submission of Information Disclosure Stmt																																																																																																																																																																																			
8021	40	8021	40	Recording each patent assignment per property (times number of properties)																																																																																																																																																																																			
1809	770	2809	385	Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																																																			
1810	770	2810	385	For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																																																			
1801	770	2801	385	Request for Continued Examination (RCE)																																																																																																																																																																																			
1802	900	1802	900	Request for expedited examination of a design application																																																																																																																																																																																			
<input checked="" type="checkbox"/> Deposit Account: Deposit Account Number: 50-0815 Deposit Account Name: Bozicevic, Field & Francis LLP																																																																																																																																																																																							
The Director is authorized to: (check all that apply) <input checked="" type="checkbox"/> Charge fee(s) indicated below <input checked="" type="checkbox"/> Credit any overpayments <input type="checkbox"/> Charge any additional fee(s) during the pendency of this application. <input type="checkbox"/> Charge fee(s) indicated below, except for the filing fee to the above-identified deposit account.																																																																																																																																																																																							
FEE CALCULATION																																																																																																																																																																																							
1. BASIC FILING FEE <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>1001</td><td>770</td><td>2001</td><td>385</td><td>Utility filing fee</td><td>385.00</td></tr> <tr><td>1002</td><td>340</td><td>2002</td><td>170</td><td>Design filing fee</td><td></td></tr> <tr><td>1003</td><td>530</td><td>2003</td><td>265</td><td>Plant filing fee</td><td></td></tr> <tr><td>1004</td><td>770</td><td>2004</td><td>385</td><td>Reissue filing fee</td><td></td></tr> <tr><td>1005</td><td>180</td><td>2005</td><td>80</td><td>Provisional filing fee</td><td></td></tr> <tr><td colspan="5" style="text-align: right;">SUBTOTAL (1)</td><td>385.00</td></tr> </tbody> </table>				Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	1001	770	2001	385	Utility filing fee	385.00	1002	340	2002	170	Design filing fee		1003	530	2003	265	Plant filing fee		1004	770	2004	385	Reissue filing fee		1005	180	2005	80	Provisional filing fee		SUBTOTAL (1)					385.00																																																																																																																																						
Large Entity		Small Entity		Fee Description	Fee Paid																																																																																																																																																																																		
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																				
1001	770	2001	385	Utility filing fee	385.00																																																																																																																																																																																		
1002	340	2002	170	Design filing fee																																																																																																																																																																																			
1003	530	2003	265	Plant filing fee																																																																																																																																																																																			
1004	770	2004	385	Reissue filing fee																																																																																																																																																																																			
1005	180	2005	80	Provisional filing fee																																																																																																																																																																																			
SUBTOTAL (1)					385.00																																																																																																																																																																																		
2. EXTRA CLAIM FEES FOR UTILITY AND REISSUE <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th colspan="2"></th> <th colspan="2">Extra Claims</th> <th colspan="2">Fee from below</th> <th colspan="2">Fee Paid</th> </tr> </thead> <tbody> <tr> <td>Total Claims</td> <td>50</td> <td>-20** = 30</td> <td>x 9</td> <td>=</td> <td>270.00</td> <td></td> <td></td> </tr> <tr> <td>Indep. Claims</td> <td>3</td> <td>-3** = 0</td> <td>x 43</td> <td>=</td> <td>0</td> <td></td> <td></td> </tr> <tr> <td>Multiple Dependent</td> <td></td> <td></td> <td>0</td> <td>=</td> <td>0</td> <td></td> <td></td> </tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse; font-size: 0.8em;"> <thead> <tr> <th colspan="2">Large Entity</th> <th colspan="2">Small Entity</th> <th rowspan="2">Fee Description</th> <th rowspan="2">Fee Paid</th> </tr> <tr> <th>Fee Code</th> <th>Fee (\$)</th> <th>Fee Code</th> <th>Fee (\$)</th> </tr> </thead> <tbody> <tr><td>1202</td><td>18</td><td>2202</td><td>9</td><td>Claims in excess of 20</td><td></td></tr> <tr><td>1201</td><td>86</td><td>2201</td><td>43</td><td>Independent claims in excess of 3</td><td></td></tr> <tr><td>1203</td><td>290</td><td>2203</td><td>145</td><td>Multiple dependent claim, if not paid</td><td></td></tr> <tr><td>1204</td><td>86</td><td>2204</td><td>43</td><td>** Reissue independent claims over original patent</td><td></td></tr> <tr><td>1205</td><td>18</td><td>2205</td><td>9</td><td>** Reissue claims in excess of 20 and over original patent</td><td></td></tr> <tr><td colspan="5" style="text-align: right;">SUBTOTAL (2)</td><td>270.00</td></tr> </tbody> </table>						Extra Claims		Fee from below		Fee Paid		Total Claims	50	-20** = 30	x 9	=	270.00			Indep. Claims	3	-3** = 0	x 43	=	0			Multiple Dependent			0	=	0			Large Entity		Small Entity		Fee Description	Fee Paid	Fee Code	Fee (\$)	Fee Code	Fee (\$)	1202	18	2202	9	Claims in excess of 20		1201	86	2201	43	Independent claims in excess of 3		1203	290	2203	145	Multiple dependent claim, if not paid		1204	86	2204	43	** Reissue independent claims over original patent		1205	18	2205	9	** Reissue claims in excess of 20 and over original patent		SUBTOTAL (2)					270.00																																																																																																						
		Extra Claims		Fee from below		Fee Paid																																																																																																																																																																																	
Total Claims	50	-20** = 30	x 9	=	270.00																																																																																																																																																																																		
Indep. Claims	3	-3** = 0	x 43	=	0																																																																																																																																																																																		
Multiple Dependent			0	=	0																																																																																																																																																																																		
Large Entity		Small Entity		Fee Description	Fee Paid																																																																																																																																																																																		
Fee Code	Fee (\$)	Fee Code	Fee (\$)																																																																																																																																																																																				
1202	18	2202	9	Claims in excess of 20																																																																																																																																																																																			
1201	86	2201	43	Independent claims in excess of 3																																																																																																																																																																																			
1203	290	2203	145	Multiple dependent claim, if not paid																																																																																																																																																																																			
1204	86	2204	43	** Reissue independent claims over original patent																																																																																																																																																																																			
1205	18	2205	9	** Reissue claims in excess of 20 and over original patent																																																																																																																																																																																			
SUBTOTAL (2)					270.00																																																																																																																																																																																		
**or number previously paid, if greater; For Reissues, see above.																																																																																																																																																																																							
				Other fee (specify) _____																																																																																																																																																																																			
				*Reduced by Basic Filing Fee Paid																																																																																																																																																																																			
				SUBTOTAL (3) (\$)																																																																																																																																																																																			
				0.00																																																																																																																																																																																			
SUBMITTED BY																																																																																																																																																																																							
Name (Print/Type)		Carol M. LaSalle		Registration No. (Attorney/Agent)																																																																																																																																																																																			
Signature				39,740																																																																																																																																																																																			
				Telephone (650) 833-7778																																																																																																																																																																																			
				Date 12/24/2003																																																																																																																																																																																			

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

This collection of information is required by 37 CFR 1.17 and 1.27. The information is required to obtain or retain a benefit by the public which is to file (and by the USPTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 12 minutes to complete, including gathering, preparing, and submitting the completed application form to the USPTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, P.O. Box 1450, Alexandria, VA 22313-1450. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450

If you need assistance in completing the form, call 1-800-PTO-9199 and select option 2.

APPLICATION INFORMATION

Application Type::
Title::

Utility
MULTIPLE JOINT IMPLANT
DELIVERY SYSTEMS FOR
SEQUENTIALLY-CONTROLLED
IMPLANT DEPLOYMENT
CRMD-002

Attorney Docket Number::
Request for Non-Publication?::
Assignee for Publication::
Total Drawing Sheets::
Small Entity?::
License US Govt. Agency::
Contract or Grant Numbers::
Sequence Submission?::
Computer Readable Form (CRF)?::

No
CardioMind, Inc.
13
Small
No
N/A
No
No

INVENTOR INFORMATION

Inventor One Given Name::
Family Name::
Postal Address Line One::
Postal Address Line Two::
City::
State or Province::
Postal or Zip Code::
Citizenship Country::

JULIAN
NIKOLCHEV
251 Duranzo Way

Portola Valley
California
94028
US

Inventor Two Given Name::
Family Name::
Postal Address Line One::
Postal Address Line Two::
City::
State or Province::
Postal or Zip Code::
Citizenship Country::

Inventor Three Given Name::
Family Name::
Postal Address Line One::
Postal Address Line Two::
City::
State or Province::
Postal or Zip Code::
Citizenship Country::

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 24353
Telephone One:: (650) 327-3400
Telephone Two:: (650) 833-7774
Fax:: (650) 327-3231
Electronic Mail:: lasalle@bozpat.com

REPRESENTATIVE INFORMATION

Representative Customer Number:: 24353

CONTINUITY INFORMATION

This application is a:: Non Prov. Of Provisional
> Application One:: 60/458,323
Filing Date:: March 26, 2003

This application is a:: Non Prov. Of Provisional
> Application Two:: 60/462,219
Filing Date:: April 10, 2003

which is a::
>> Application Three::
Filing Date::

which is a::
>>> Application Four::
Filing Date::

PRIOR FOREIGN APPLICATIONS

Foreign Application One::
Filing Date::
Country::
Priority Claimed::

IMPLANT DELIVERY DEVICE (II)

FIELD OF THE INVENTION

[0001] This invention relates to devices and methods for placing one or more implants such as helical scaffolds or occlusive members into tubular organs or open regions of the body. The implants may be of types that maintain patency of an open anatomical structure, occlude a selected volume, isolate a region, or collect other occlusive members at a site. Included in the description are devices and methods for deploying the various implants, typically without a sheath, in a serial fashion, and with high adjustability.

BACKGROUND OF THE INVENTION

[0002] Implants such as stents and occlusive coils have been used in patients for a wide variety of reasons. For instance, stents are often used to treat arterial stenosis secondary to atherosclerosis. Various stent designs have been developed and used clinically, but self-expandable and balloon-expandable stent systems and their related deployment techniques are now predominant. Examples of self-expandable stents currently in use are WALLSTENT® stents (Schneider Peripheral Division, Minneapolis, MN) and Gianturco stents (Cook, Inc., Bloomington, IN). The most commonly used balloon-expandable stent is the PALMAZ® stent (Cordis Corporation, Warren, NJ).

[0003] Typically, after balloon angioplasty has been performed, either a self-expandable or balloon-expandable stent is advanced over a guidewire and positioned at the target site. A protective sheath or membrane is then retracted proximally to allow expansion of a self-expanding stent. Alternatively, a delivery balloon may be inflated, thereby expanding the stent.

[0004] Despite improvements in delivery systems, balloon design, and stent design, these over-the-guidewire and/or sheathed self-expanding stent deployment

systems still have their limitations. For instance, sheathed stents tend to move forward when the sheath is pulled back, deploying them imprecisely. The sheathed design also requires that the stent delivery system be larger in diameter and less flexible. Furthermore, for sheathed systems, the interventional procedure may only proceed if the vessel of interest is of sufficiently large diameter to allow sheath placement to avoid significant damage to the luminal surface of the vessel. Moreover, balloon-expandable stents, by virtue of a large diameter and relative inflexibility, are often unable to reach distal vasculature. For both self-expandable and balloon-expandable stent deployment systems, repositioning or step-wise release of the stent are usually not available features. Similarly, occlusive coil placement systems such as systems that deliver detachable platinum coils and GDC® coils also generally do not contain repositionable or step-wise release features.

[0005] Consequently, a smaller diameter (lower profile), repositionable implant deployment device that releases an implant into, or upon, a body region in a more precise, continuous or step-wise fashion, without the use of a sheath or balloon would provide significant benefit to patients with various medical conditions.

SUMMARY OF THE INVENTION

[0006] The present invention is a low profile implant delivery device that may be deployed without a sheath, and is designed to release portions of implants simultaneously or sequentially.

[0007] In one variation, the implant delivery device includes a noninflatable, elongate delivery guide member having a distal end and configuration that allows it to direct at least one implant having an exterior and interior surface to an anatomical treatment site by manipulation by a user. The at least one implant has a delivery diameter prior to its release, is located proximally of the distal end of the delivery guide member prior to release, and has at least one releasable joint configured to maintain at least a section of the at least one implant at the delivery diameter until

release of the at least one releasable joint. The delivery guide member sections that are proximal and distal to the at least one implant also have delivery diameters. These guide member delivery diameters may be substantially equal to the at least one implant delivery diameter prior to implant release.

[0008] The implant may be a helical scaffold, e.g., a stent, in particular, a self-expandable stent, or it may be an occlusive coil. The implant may be symmetric or asymmetric. In some instances, the implant delivers a therapeutic agent.

[0009] The delivery guide member may include a wire and/or a tubular member having a lumen. If desired, a radioopaque marker may be included on the delivery guide to aid with its placement. When designed to include a tubular member, it co-axially surrounds at least a portion of the delivery guide, and works as a tubular actuator configured to release at least one releasable joint upon distal axial movement along the delivery guide member.

[0010] In another variation, the implant delivery device includes an actuator slidably located at least partially within the delivery guide member and is configured to mechanically release at least one releasable joint upon axial movement of the actuator within the delivery guide member. In other variations, the actuator may also release at least one releasable joint upon rotational movement of the actuator, upon the application of fluid pressure in the delivery guide member lumen, or upon application of a suitable DC current to the at least one releasable joint. Release of the releasable joints using any one of the release mechanisms described above may be sequential, if precise positioning is required, or may be simultaneous. Each feature of each variation may be used on any of the other variations.

[0011] The implant delivery device may be included in a system for implant delivery which further employs one or more embolic filters at either the proximal or distal section of the delivery guide, or at both the proximal and distal sections of the delivery guide.

[0012] The system may be used for implant delivery into lumens of tubular organs including, but not limited to, blood vessels (including intracranial vessels, large vessels, peripheral vessels, adjacent aneurysms, arteriovenous malformations, arteriovenous fistulas), ureters, bile ducts, fallopian tubes, cardiac chambers, ducts such as bile ducts and mammary ducts, large and small airways, and hollow organs, e.g., stomach, intestines, and bladder. The implant may be of a design that is of a size that is smaller during delivery and larger after implantation. The design may be used to provide or to maintain patency in an open region of an anatomical structure, or to occlude a site, or to isolate a region (e.g., to close an aneurysm by blocking the aneurysm opening or neck by placement in an adjacent anatomical structure such as an artery or gastrointestinal tubular member), or to corral or collect a number of occlusive devices (e.g., coils or hydratable polymeric noodles) or compositions at a site to be occluded or supported. In another variation, the implant is located in a gap between proximal and distal sections of the delivery guide member. The system may also be employed for implant delivery into solid organs or tissues including, but not limited to, skin, muscle, fat, brain, liver, kidneys, spleen, and benign and malignant tumors. Preferably, the implant is delivered to a target site in a blood vessel lumen.

[0013] In a general aspect, the system is a guidewire-less implant delivery system that includes a noninflatable, elongate delivery guide member having a proximal end and a distal end. The guide member is configured to direct at least one implant having an exterior and interior surface to an anatomical treatment site by manipulation by a user. The at least one implant has a delivery diameter prior to release of the at least one implant and is located proximally of the distal end of the delivery guide member prior to release. The at least one releasable joint is configured to maintain at least a section of the at least one implant at the delivery diameter until release of the at least one releasable joint. The guidewire-less system also has a flexibility and remote directability such that a user may direct the distal end of the

guide member into, and introduce, the at least one implant into a coronary artery solely by manipulation of the delivery guide member from its proximal end.

BRIEF DESCRIPTION OF THE DRAWING(S)

[0014] Figure 1A is a side view of an implant delivery device with a partial cross-section of the distal section of the delivery guide.

[0015] Figure 1B is a cross-sectional view of the delivery guide and implant taken at line 1B-1B in Figure 1A.

[0016] Figure 2 is a side view of an implant delivery device having a tubular member (actuator) attached to the proximal implant end with a partial cross-section of the distal section of the delivery guide.

[0017] Figure 3A is a side view of the implant in Figure 2 being expanded by distally moving the tubular member towards the distal section of the delivery guide.

[0018] Figure 3B is a longitudinal cross-sectional view of a distal implant release mechanism.

[0019] Figures 3C₁ and 3C₂ are longitudinal cross-sectional views of an implant delivery device having a mechanical release mechanism for deploying one end of an implant.

[0020] Figures 3D₁-3D₃ are longitudinal cross-sectional views of an implant delivery device having a mechanical release mechanism for independently releasing the implant ends.

[0021] Figures 3E₁-3E₄ are longitudinal cross-sectional views of an implant delivery device having a hydraulic release mechanism for independently releasing the implant ends.

[0022] Figures 3F₁-3F₂ are longitudinal cross-sectional views of a variation of the hydraulic release mechanism described in 3E₁-3E₄.

[0023] Figures 3G₁-3G₃ are longitudinal cross-sectional views of an implant delivery device having a mechanical release mechanism according to another variation of the invention.

[0024] Figure 4 is a longitudinal cross-sectional view of an implant delivery device having a mechanical release mechanism according to yet another variation of the invention.

[0025] Figures 5A-5C are longitudinal cross-sectional views of an implant delivery device having an electrolytic implant release mechanism.

[0026] Figure 5D shows a longitudinal cross-sectional view of an implant delivery device having an electrolytic release mechanism according to another variation of the invention.

[0027] Figure 5E shows a longitudinal cross-sectional view of an implant delivery device having a thermal release mechanism according to one variation of the invention.

[0028] Figures 6A-6D show the general method for serially releasing an implant at a target site.

DETAILED DESCRIPTION OF THE INVENTION

[0029] Described here are devices, systems, and methods for delivering implants into both open and solid regions of the body. The term "region" as used herein refers to luminal structures as well as solid organs and solid tissues of the body, whether in their diseased or nondiseased state. Examples of luminal structures include, but are not limited to, blood vessels, arteriovenous malformations, aneurysms, arteriovenous fistulas, cardiac chambers, ducts such as bile ducts and mammary ducts, fallopian tubes, ureters, large and small airways, and hollow organs, e.g., stomach, intestines, and bladder. Solid organs or tissues include, but are not limited to, skin, muscle, fat, brain, liver, kidneys, spleen, and benign and malignant tumors.

[0030] The device assembly generally includes an elongate, perhaps solid delivery guide, an implant, and one or more implant release mechanisms. Guidewire-less systems are used to deliver the one or more implants. By "guidewire-less" it is meant that the system does not require a guiding device of a diameter less than that of the guide member upon which the implant is delivered to reach a chosen implantation site. Instead, the guidewire-less system is flexible and remotely directable, the remote directability being such that a user may direct the distal end of the guide member into, and introduce, the at least one implant into a coronary artery solely by manipulation of the delivery guide member from its proximal end.

Delivery Guide or Delivery Guide Member

[0031] The delivery guide is elongate and has a comparatively small effective diameter. It has the function of permitting delivery of the implant to a selected site and supporting the implant in a collapsed form during positioning and implantation. The delivery guide is usually noninflatable. It may also be solid, or may have a lumen extending therethrough, depending on such factors as the degree of flexibility required, type of associated release mechanism, the constitution material, and the like. The tip of the delivery guide may be tapered and/or straight, curved, or j-shaped, depending on factors such as physician preference, the anatomy of the tubular organ or region of interest, degree of stiffness required, and the like. The delivery guide may or may not include an outer spring coil, for, e.g., fluoroscopic visualization.

[0032] The delivery guide member and the delivery system into which it is placed desirably serves the function as would a guidewire in, for instance, a cardiac or neurovascular catheterization procedure. The concept that the delivery guide member or system including that guide member and implant(s) is "remotely directable" is to say that the combination of physical parameters of the delivery guide member, implant, and joints are selected to allow advancement of the system much in

the same way as would be a guidewire. Such physical parameters include, for instance, choice of materials, stiffness, size of materials, physical or chemical treatment, tapering (if desired), all in the same way that those physical parameters are selected in designing a cardiovascular or neurovascular guidewire.

[0033] The delivery guide may be made from any biocompatible material including, but not limited to, stainless steel and any of its alloys; titanium alloys, e.g., nickel-titanium alloys; other shape memory alloys; tantalum; polymers, e.g., polyethylene and copolymers thereof, polyethylene terephthalate or copolymers thereof, nylon, silicone, polyurethanes, fluoropolymers, poly (vinylchloride), and combinations thereof. The diameter of the delivery guide may usually be about 0.013 cm to about 0.130 cm (about 0.005 inches to about 0.05 inches), more usually about 0.013 cm to about 0.076 cm (about 0.005 inches to about 0.03 inches), and more usually still about 0.015 cm to about 0.030 cm (about 0.006 inches to about 0.012 inches). In a preferred variation, the diameter of the delivery guide is approximately about 0.020 cm (about 0.008 inches).

[0034] A lubricious coating may be placed on the delivery guide if desired to facilitate advancement of the delivery guide. The lubricious coating typically will include hydrophilic polymers such as polyvinylpyrrolidone-based compositions, fluoropolymers such as tetrafluoroethylene, or silicones. In one variation, the lubricious coating may constitute a hydrophilic gel. Furthermore, the delivery guide may include one or more radioopaque markers that indicates the location of the distal section of the delivery guide upon radiographic imaging. Usually, the marker will be detected by fluoroscopy.

Implants

[0035] The implant itself may be of a shape tailored to achieve a specific purpose. As noted elsewhere, if the purpose of the implant is to provide or to maintain patency of an anatomical structure such as an artery or duct, the implant

shape after implantation is itself tubular. The shape may be symmetric or asymmetric, as the purpose dictates.

[0036] Other shapes, including cage structures, may be used to provide patency to vessels or to act as collecting or coralling structures for occlusive members or materials.

[0037] If the purpose or task is to occlude a lumen or open region, the implant may have the form of an occlusive coil that remains helical after deployment or assumes a random orientation.

[0038] In one variation, the implant for placement into a luminal structure is a helical scaffold, e.g., a stent, but any scaffold shape that maintains patency of a lumen may be used. The stents are typically self-expanding stents, such as described in U.S. 4,768,507 to Fishell et al., U.S. 4,990,155 to Wilkoff et al., and U.S. 4,553,545 to Maass et al. In another variation, the implant is an occlusive member, e.g., an occlusive coil, such as described in U.S. 5,334,210 to Gianturco and U.S. 5,382,259 to Phelps et al.

[0039] The interior and exterior surfaces of the implant may be designed to prevent the activation of pathological processes during or after implant deployment. For example, in the case of a vascular stent, the exterior stent surface may be formed to be smooth to decrease the likelihood of intimal damage upon stent release (which would trigger the inflammatory process and attract atheromatous plaque-forming cells). The interior stent surface may also be smooth to minimize turbulent flow through the stent and decrease the risk of stent thrombosis.

[0040] Important physical properties of the implant to consider include, but are not limited to: length, (stent) diameter in the expanded state, degree of flexibility and lateral stiffness, and the like. These physical properties will be modified to account for such factors as lumen diameter, length of any stenosis, type of luminal structure, or solid organ or tissue involved.

[0041] Metals such as stainless steel and tantalum, or metal alloys such as alloys of nickel and titanium, specifically including superelastic alloys such as NITINOL or Elgiloy which are commonly used by those of skill in the art, may be used to form the implants. However, the implants may also be made from biodegradable polymers, e.g., copolymers of lactic and glycolic acid, or nonbiodegradable polymers, e.g., copolymers of ethylene and vinyl acetate.

[0042] The implants may also include a therapeutic agent. Examples of therapeutic agents that may be used in the implants include, but are not limited to, antibiotics, anticoagulants, antifungal agents, anti-inflammatory agents, antineoplastic agents, antithrombotic agents, endothelialization promoting agents, free radical scavengers, immunosuppressive agents, thrombolytic agents, and any combination thereof. If the implant is a stent, an antithrombotic agent is preferably included.

[0043] Examples of selective antithrombotic agents include acetylsalicylic acid, argatroban, cilostazol, ciprofibrate, clopidogrel, clopridomen, dalteparin, daltroban, defibrotide, dipyridamole, enoxaparin, epoprostenol, indobufen, iloprost, integrelin, isbogrel, lamifiban, lamoparan, nadroparin, ozagrel, picotamide, plafibride, reviparin sodium, ridogrel, sulfinpyrazone, taprostene, ticlopidine, tinzaparin, tirofiban, triflusal, and any of their derivatives.

[0044] The therapeutic agent may be coated onto the implant, mixed with a biodegradable polymer or other suitable temporary carrier and then coated onto the implant, or, when the implant is made from a polymeric material, dispersed throughout the polymer.

[0045] The implant may include a radioactive material. The radioactive material may be selected on the basis of its use. For instance, the material may be included in an implant where the implant is in the form of a stent that is to be situated over a vascular stenosis. The radioactivity lowers the incidence of re-stenosis. Additionally, the radioactivity may serve the function of a tracer, to allow detection

of the location of the implant during the procedure or anytime thereafter. Suitable radioactive tracers include isotopes of gallium, iodine, technetium, and thallium.

Release Mechanism

[0046] In one variation of the generic implant delivery system, as shown in Figure 1A, the implant delivery system includes a delivery guide 100. Delivery guide 100 has a proximal section 102 and a distal section 104. An implant, in this case depicted as a stent 106, surrounds a portion of the distal section 104 of the delivery guide, and is releasably attached to the distal section 104 of the delivery guide. The implant 106, as shown in Figure 1B, is concentrically adjacent to the delivery guide 100. Although I show the stent in Figure 1A and 1B as the implant (106), I depict it in this fashion solely for the illustrative purpose of indicating the siting of the implant 106 on the delivery guide 100 with the distal and proximal implant release mechanism (109, 111). Various implant release mechanisms or structures are discussed in greater detail below.

[0047] Implant 106 is shown to be directly attached to, is contiguous to, the delivery guide 100 at the proximal end 108 of the implant and distal end 110 of the implant. In the system shown in Figure 1A, implant 106 may be secured to the delivery guide 100 by such generic controllably releasable mechanisms as mechanical, thermal, hydraulic, and electrolytic mechanisms, or a combination thereof. Examples of these release mechanisms will be discussed below.

[0048] Consequently, release of the implant 106 from the delivery guide 100 may be achieved through a mechanical detachment process involving, e.g., twisting of the delivery guide, such as described by Amplatz in U.S. 6,468,301, or translational movement of the delivery guide in relation to the implant. Implant release may also be achieved using a thermally detachable joint, such as described in U.S. 5,108,407 to Geremia et al., an electrolytic detachable joint, such as described in

U.S. 5,122,136 and U.S. 5,354,295, both to Guglielmi et al., or a combination thereof.

[0049] In another variation, and as shown in Figure 2, the system includes a tubular member 200 co-axially mounted on a delivery guide 202. Tubular member 200 may form a component of the delivery guide 202 that cooperates with one or more of the releasable mentioned joints on the implant (209, 211) to release those joints (and therefore, release the implant 204) upon application of a releasing movement, axial or twisting. An implant, e.g., a stent 204, is mounted on a distal section 206 of the delivery guide and the distal end 208 of the tubular member is attached to the proximal end 210 of the stent. The distal end 212 of the stent is attached using a releasable joint 211 to the distal section 206 of the delivery guide 202.

[0050] As mentioned above, I may use a tubular member mounted coaxially about the delivery guide, that slides axially about that delivery guide, as an actuator to release the implant. The outer tubular member may also be used to pre-position the implant. For instance, prior to release, the outer tubular member may be used to expand the implant to therefore obscure its placement, and so to permit adjustment of the placement. Figure 3A shows a stent 300 expanding as tubular member 302 is moved distally on the delivery guide 304, in the direction of the arrow. The stent is then released from the delivery guide. Specifically, the distal end 306 of the stent is released from a distal section 308 of the delivery guide, followed by release of the proximal end 310 of the stent from the distal end 312 of the tubular member. As mentioned above, the stent 300 may be secured to a distal section 308 of the delivery guide by such mechanisms as lock and key arrangements, biocompatible adhesives, soldering, or a combination thereof. Consequently, stent release may be achieved through a mechanical detachment process, a thermal detachment process (e.g., by heat produced from an exothermic reaction), an electrolytic detachment process, or a combination thereof.

[0051] Figures 3B and 3C show yet another variation of a stent release mechanism. In Figure 3B, brackets 314 may be used to couple the stent 300 to the distal section 308 of the delivery guide. Separation of the stent 306 from the brackets 314, e.g., by one of the detachment processes mentioned above, releases the distal end 306 of the stent from a distal section 308 of the delivery guide, allowing the stent distal end 306 to expand in the tubular organ.

[0052] Controllable release of an end of an implant from the delivery guide may be accomplished using the structure of Figure 3C₁. Brackets 314 couple the stent proximal end 310 to the distal region 312 of the tubular member 313 that forms a portion of the delivery guide. The brackets 314 have a ramped region 316 which are proximally adjacent to an enlarged (and perhaps ball- or barrel-shaped) portion 318 of the delivery guide and bracket arms 320. The delivery guide and stent each have a delivery diameter, and these delivery diameters may be substantially equal prior to release of the stent. When the actuator 305 is moved proximally, as shown by the direction of the arrow, the ball-shaped portion 318 forces the ramped regions 316 of the brackets outward from the delivery guide axis, in a radial fashion, causing the bracket arms 320 to be displaced radially outwardly from the proximal end 310 of the stent, thereby releasing the stent proximal end 310.

[0053] Figure 3C₂ shows the results of moving the actuator 305 proximally. The clips (316) have rotated as shown due to the force exerted upon the ramps (317) by the ball (318). The implant (320) has expanded in diameter from that found in its undelivered form.

[0054] The actuator may be attached, perhaps with a distal radioopaque coil or directly, to a distal section (not shown) of the guide member.

[0055] Figure 3D₁, shows a delivery system 319 in which the two ends of the implant 321 may be independently deployed by using an actuator 304 having a proximal releasing ball 322 and a distal releasing ball 327. The implant 321 is located in a gap between sections of the delivery guide and are releasably attached to

the delivery guide by brackets or clips. The two balls are spaced in such a way that, in the variation shown in Figure 3D₁, the distal ball 327 releases the distal end 331 of implant 321 and the proximal ball 322 then releases the proximal end 329 of implant 321 upon additional proximal movement of actuator 304. This sequence of events is shown in Figs. 3D₁, 3D₂, and 3D₃. The implant 321, is shown to be completely released in Figure 3D₃. In this variation, the implant 321 may be self-expanding, e.g., constructed of a superelastic alloy such as nitinol or another alloy having high elasticity, e.g., an appropriate stainless steel.

[0056] A structure similar to that shown in Figures 3D₁, 3D₂, and 3D₃ may also be used to deploy an implant using fluid pressure as the releasing impetus.

[0057] Figures 3E₁, 3E₂, 3E₃ and 3E₄ show a hydraulic variation. Shown are the delivery guide 350, having a hollow lumen 352, a self-expanding implant 354 (shown variously as non-expanded (e.g., in a "first form") in Fig. 3E₁, partially expanded in Fig. 3E₂, and fully expanded in Figs. 3E₃ and 3E₄ (e.g., in a "second form")), and an actuator 356 with a sealing member 358 and a radio-opaque member 360.

[0058] The implant 354 (here shown to be a stent or the like) is held to the delivery guide 350 during delivery to the selected treatment site using distal brackets 364 and proximal brackets 362, or clips or the like. The proximal and distal brackets (364, 362) either include regions that cooperate with the fluid in lumen 352 to move upon application of increased pressure in that lumen 352 and release the implant 350 or move in concert with a separate pressure sensitive motion component.

[0059] Figure 3E₁ shows the actuator 356 as the sealing member 358 approaches the various orifices or openings (proximal orifices 366 and distal orifices 368) communicating from the lumen 356 to the hydraulically or fluidly actuatable clips or retaining brackets (proximal brackets 362 and distal brackets 364).

[0060] Included in the description of this variation is a radio-opaque marker 360 on the actuator shaft 356 that allows the user to simply line up that actuator

marker 360 with a corresponding radio-opaque marker 370 or the delivery guide 350, increase the pressure in lumen 352 (via syringe, pump, etc.) and deploy the proximal end 371 of implant 354. The interior pressure raises or rotates the proximal clips or brackets 362 and moves them out of contact with the implant 354. Figure 3E₂ shows the movement of the proximal end of implant 354 away from the delivery guide 350.

[0061] Figure 3E₃ shows the axial movement of actuator 356 distally to a position where the sealing member 358 is positioned to actuate distal clips or brackets 364 and release the distal end of implant. Again, a radio-opaque marker 374 (perhaps with an additional identification band 376) has been depicted to show alignment of the radio-opaque marker or band 360 on the actuator shaft 356 prior to the increase in pressure for deployment.

[0062] Figure 3E₄ shows final deployment at the implant 354 and proximal movement at the actuator 356, just prior to withdrawal of the delivery guide 350. The distal and proximal clips or brackets (362, 364) have relaxed to the surface of the delivery guide 350.

[0063] Alternatives to certain of the elements shown in the variation found in Figs. 3E₁ to 3E₄ is seen in Figs. 3F₁ and 3F₂ and includes, e.g., a cover element 380 to block or cover proximal orifices 366 during the pressurization of the distal orifices 368. The cover element 380 includes holes 382 to allow fluid flow past the cover element 380.

[0064] Fig. 3G₁ shows a variation of the described system in which an implant or stent 371 is maintained in position on a hollow delivery guide 373 using spring clips 375 proximally and 377 distally. The spring clips hold the implant 371 in place during delivery and against guide member 373. An actuator 379 is used to remove the clips 375, 377 sequentially and to release each end of implant 371 in an independent fashion. Clips 375 and 377, after actuation or release, remain interior to the guide member 373 for later removal with that guide member. The system shown in Figures 3G₁, 3G₂ and 3G₃ may be used to deliver a number of implants in a

sequential fashion. Since the retainer clips 375, 377 remain within the guide member 373 after delivery, the actuator 379 is able to slide past the site on guide member 373 where the clips 375, 377 resided prior to implant 371 deployment, down to and distally to a site on the guide member having another implant for subsequent delivery. Consequently, an arrangement such as this may be used to deploy, in a sequential fashion, a number of stents or the like without withdrawal of the guide member.

[0065] In the variation shown in Figs. 3G₁, 3G₂ and 3G₃, the clips 375 and 377 are spring-biased to collapse within the lumen 381 of the guide member 373 once they are pushed into the respective slots 383 provided for such retraction. Such spring loaded clips retain the self expanding stent or implant 371 onto the face of guide member 373. Each of clips 375, 377 are shown in this variation to have hook members 387, 389 that engage the implant 371, often axially stretching the implant 371 and maintaining the delivery radius of the implant 371 as shown.

[0066] As shown in Fig. 3G₁, actuator 379 is pushed distally along the outer surface of guide member 373 until it contacts the proximal end of clip 375. Further distal movement of actuator 379 urges clip 375 into lumen 381 thereby rotating horn 387 out of cooperating receptacle area in implant 371.

[0067] Fig. 3G₂ shows the results of such movement after clip 375 has completed its springed closure within lumen 381. As shown in that Figure, the proximal end of implant 371 has expanded and yet the distal end of implant 371 remains closed and hooked to distal clip 377. This semi-open condition allows for some adjustment of the implant if needed. Fig. 3G₃ shows the results of additional distal movement of actuator 379 until it contacts distal clip 377 (shown in Fig 3G₃ in its collapsed form) and thereby allowing the distal end of implant 371 to self-expand into the chosen treatment site.

[0068] Fig. 3G₃ shows that guide member 379 is free. Implant 371 is shown in its self expanded form no longer adjacent the central guide member 379. Actuator 379 is situated within implant 371 and is no longer in contact with proximal clip 375

nor distal clip 377. Actuator 379 is thus able to continue distally to another implant containing site positioned in a more distal site on the guide member 373.

[0069] The mechanical variation shown in Figs. 3G₁, 3G₂, 3G₃ may be modified in such a way that the actuator is interior to the lumen of the guide member and deploys the implant upon distal movement of the actuator by providing an actuator with a slot or other "room-making" provisions in the actuator. The actuator and any retained clips would then be used to actuate the clips in the next more distal implant if so desired.

[0070] In yet a further variation, the system releases an implant (shown as a stent 404 in Fig. 4) attached to a delivery guide 400 by one or more attachment arms 402 positioned, e.g., at the implant proximal and distal ends, by sliding a tubular member 406, mounted co-axially on the delivery guide 400, distally over the delivery guide 400. The stent 404 is secured to the delivery guide 400 when the attachment arms 402 are in a radially expanded configuration (as illustrated in Figure 4). The tubular member 406 urges the attachment arms 402 into a compressed configuration as it slides distally over the delivery guide 400, in the direction of the arrow. When the attachment arms 402 are compressed by the tubular member 406, they are moved inward from the stent 404, toward the central axis of the delivery guide 400, thereby releasing the stent 404 from the delivery guide 400. Stent detachment occurs in a serial fashion as the tubular member 406 is moved distally, with detachment of the stent proximal end 408 occurring before detachment at the stent distal end 410. Consequently, if the stent position requires readjustment after detachment of the stent proximal end, the stent may be repositioned prior to detaching the stent distal end. In one variation, the tubular member is a balloon catheter.

[0071] The attachment arms 402 are generally made from the same materials as the delivery guide 400, e.g., stainless steel or nickel-titanium alloy, and will typically have a length, thickness, shape, and flexibility appropriate for its intended mechanism of release. The distal ends 412 of the attachment arms may be of any

design, so long as one or more of them, when in a radially expanded configuration, secures a portion of a stent to a delivery guide, and when in a compressed configuration, releases that same stent portion from the delivery guide.

[0072] The tubular member may be a thin-walled tube (e.g., approximately 0.005 cm (0.002 inches) in thickness) with an outside diameter ranging from about 0.025 cm to about 0.139 cm (0.010 inches to about 0.055 inches), more usually from about 0.025 cm to about 0.05 cm (0.010 inches to about 0.020 inches), and more usually still from about 0.025 cm to about 0.035 cm (0.010 inches to about 0.014 inches). Depending on such factors as degree of flexibility or durometer required, they may be made from various metals or metal alloys, including, but not limited to, stainless steel and nickel-titanium alloy, or from various polymers, such as polyvinyl chloride, polyethylene, polyethylene terephthalate, and polyurethane.

[0073] Figures 5A, 5B, and 5C show a variation of the described delivery system 500 in which a member of electrolytic delivery joints are used to deploy an implant 502, such as a stent.

[0074] The electrolytic delivery joints shown here (e.g., 504 in Figure 5C) are well known as controllable delivery joints for placement of vaso-occlusive coils. One such commercially available device using an electrolytically detachable joint is sold by Target Therapeutics, a subsidiary of Boston Scientific Corp., as the Guglielmi Detachable Coil (or "GDC"). Numerous patents to Dr. Guglielmi describe the theory of its use.

[0075] In essence, the electrolytically erodible joint is a section of an electrical circuit that is not insulated and is of a metallic material that does not form insulating oxides when exposed to an aqueous environment (e.g., aluminum and tantalum) and is sufficiently "non-noble" that it will either electrolytically erode by ionic dissolution into an anatomical fluid or, perhaps, electrochemically erode by forming readily soluble oxides or salts.

[0076] The erodible joint 504 shown in Figure 5C is a bare metal of a size, diameter, etc. that erodes away when a current is applied to insulated wire 506. The current flow is from a power supply through insulated wire 506, bare joint 504, into the ionic anatomical fluid surrounding the site to be treated, and back to a return electrode situated perhaps on the patient's skin and then back to the power supply. The current flows through the circuit so long as the joint 504 exists.

[0077] With that background, Figure 5A shows a device having several joints (504, 508, 510, 512) that each may be independently severed to controllably deploy the implant 502. Implant 502 is shown having coils (514, 516) that are terminated at each end by an erodible joint and that, prior to the severing of a joint, hold this implant 502 to the surface of the delivery member 520. The implant 500 is self-expanding, once released. The wires forming the two coils in this variation slide within the implant or "uncoil" and thereby allow the implant body itself to expand. The coils may comprise (if electrically connected to the erodible joint) a metal that is higher in the Mendeleev Electromotive Series than is the composition at the electrolytic joint or the coils may comprise a polymer that may be bio-erodible or not.

[0078] In any case, a suitable way to assure that the coils (514, 516) maintain the low profile of the implant 502 during delivery is via the placement of the various conductive wires (506, 516, 518, 520) through the adjacent holes (524, 526, 528) and fill the holes with e.g., an epoxy to hold all in place. Independently causing current to flow through each of the joints will release the implant in the region of the released joint. Once all joints are eroded, the implant is released.

[0079] Although release from proximal and distal ends of the tubular form of the implants has been described, detachment from a delivery guide is not so limited. In another variation, the stent is attached to the delivery guide at one or more positions along the length of the stent, in addition to attachment at the proximal and distal implant ends. Once the distal stent end is released, the additional attachments may be independently released until detachment at the proximal implant end releases

the implant entirely from the delivery guide. Serial release may provide better control of positioning in tubular organs.

[0080] Figs. 5D and 5E show in more detail, the components of an electrolytic joint (as may be found in Figs 5A, 5B and 5C) and another electrically actuated joint using a meltable or softenable or polymerically sizable joint.

[0081] Fig. 5D shows the insulated wire 524 with insulation 523 and conductor 525. The electrolytic joint 504 is also shown. In this variation, the wire 524 is shown to be secured into the delivery guide wall 520 by, e.g., an epoxy 527, an alternative or cooperative band or component 529 holding the wire 524 to the surface of guide member 520 is also shown. After erodable joint 504 is eroded, the implant of 502 expands and leaves the securement band 529 on the delivery guide 520.

[0082] Fig. 5E shows a similar variation but the joint comprises a thermoplastic adhesive or shape changing polymer 531 situated on the end of wire 525 and within a cup or other receptacle 533. The adhesive is of the type that changes form or viscosity upon application of current to the joint. In this variation, the thermoplastic is rendered conductive, but resistive, by introduction of material such as carbon black into the polymeric adhesive. As soon as the polymer changes its shape, form, or phase, the implant expands to the desired form about the central guide member 520 again, the wire may be held in place with an adhesive 527 if so desired.

[0083] Although the figures show wires and other remnants of the joints remaining exterior to the central guide member 520 and the others shown and described here, it is desirable that these not be situated in such a way that they will harm the tissues into which they are placed.

Delivery Method

[0084] The implant delivery devices described herewith may include multiple implants on a single delivery guide or may be used in conjunction with other instruments, as seen appropriate, to treat the target site. In general, the tubular organ

of interest is percutaneously accessed, but the method of accessing will usually be dependent on the anatomy of the organ, medical condition being treated, health status of the subject, and the like. Consequently, access by a laparoscopic or open procedure may also be obtained.

[0085] Figures 6A-6D show the general method of deploying a stent using my described system. After obtaining access to the tubular organ of interest 600 (blood vessel in Figure 6A), a delivery guide 602 is placed through the selected area of stenosis 604 at the target site. A balloon catheter 606 is then advanced over the delivery guide 602, and balloon angioplasty performed to dilate the area of stenosis 604 (Figure 6B). The balloon catheter 606 is then retracted proximally and the delivery guide 602 exchanged for a stent delivery device 608 (Figure 6C).

Appropriate placement of the stent is guided by radioopaque markers 616 on the delivery guide 612. The distal end 610 of the stent is then released from the delivery guide 612. At this point, stent position may again be checked by verifying the location of the radioopaque markers. The proximal stent end 614 is then released from the delivery guide 612.

[0086] If desired, an embolic filter may be used during stent deployment to filter any debris generated during the procedure. The filter will usually be attached to the delivery guide such that it filters debris distal to the stent, but may also be attached to the delivery guide proximal to the stent, or both distal and proximal to the stent. The filter may be of any design, as long as it does not affect the substantially atraumatic, low profile, and controlled release characteristics of the stent delivery device. Typically, the filter is basket-shaped, and made from a shape-memory material, e.g., an alloy of titanium and nickel. The filter will usually be contained within the balloon catheter lumen, and deployed to its pre-designed shape once the balloon catheter is removed. Following placement of the stent, the balloon catheter may be advanced over the delivery guide to enclose the filter with any accumulated

debris. The balloon catheter, filter, and delivery guide may then be removed from the body.

Applications

[0087] The implant delivery system may be used in mammalian subjects, preferably humans. Mammals include, but are not limited to, primates, farm animals, sport animals, cats, dogs, rabbits, mice, and rats.

[0088] The system may be employed for implant delivery into lumens of tubular organs including, but not limited to, blood vessels (including intracranial vessels, large vessels, peripheral vessels, aneurysms, arteriovenous malformations, arteriovenous fistulas), ureters, bile ducts, fallopian tubes, cardiac chambers, ducts such as bile ducts and mammary ducts, large and small airways, and hollow organs, e.g., stomach, intestines, and bladder. The system may also be employed for implant delivery into solid organs or tissues including, but not limited to, skin, muscle, fat, brain, liver, kidneys, spleen, and benign and malignant tumors. Preferably, the implant is delivered to a target site in a blood vessel lumen.

[0089] Clinically, the system may generally be used to treat stenosis of various tubular organs, arising from such etiologies as atherosclerosis, autoimmune conditions, scarring, or exterior compression, e.g., as may be seen with a neoplastic process. The system may also be used to treat medical conditions in which luminal occlusion is desired, e.g., to treat aneurysms, arteriovenous fistulas, and arteriovenous malformations. Furthermore, the system may be employed to deliver implants into such areas as joint spaces, spinal discs, and the intraperitoneal or extraperitoneal spaces.

* * *

All publications, patents, and patent applications cited herein are hereby incorporated by reference in their entirety for all purposes to the same extent

as if each individual publication, patent, or patent application were specifically and individually indicated to be so incorporated by reference. Although the foregoing invention has been described in some detail by way of illustration and example for purposes of clarity of understanding, it will be readily apparent to those of ordinary skill in the art in light of the teachings of this invention that certain changes and modifications may be made thereto without departing from the spirit and scope of the appended claims.

CLAIMS

1. An implant delivery device comprising:
 - a.) a noninflatable, elongate delivery guide member having a distal end, said guide member configured to direct at least one implant having an exterior and interior surface to an anatomical treatment site by manipulation by a user,
 - b.) the at least one implant having a delivery diameter prior to release of the at least one implant, the implant located proximally of the distal end of the delivery guide member prior to release, and
 - c.) at least one releasable joint configured to maintain at least a section of the at least one implant at the delivery diameter until release of the at least one releasable joint.
2. The device of claim 1 wherein the at least one implant comprises exactly one implant.
3. The device of claim 1 wherein the at least one implant comprises more than one implant.
4. The device of claim 1 wherein the delivery guide member comprises a distal guide section and a proximal guide section and a gap between the distal guide section and the proximal guide section and the at least one implant is located between the distal guide section and the proximal guide section.
5. The device of claim 1 wherein the delivery guide member has a diameter distally on the proximal guide section and a diameter proximally on the distal guide

section, and wherein the at least one implant delivery diameter is substantially equal to the delivery guide member diameter.

6. The device of claim 1 wherein the delivery guide member comprises a tubular member having a lumen.

7. The device of claim 6 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon axial movement within the delivery guide member.

8. The device of claim 7 wherein the actuator is configured to sequentially release more than one releasable joint upon axial movement within the delivery guide member.

9. The device of claim 7 wherein the actuator is configured to simultaneously release more than one releasable joint upon axial movement within the delivery guide member.

10. The device of claim 6 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon rotational movement within the delivery guide member.

11. The device of claim 6 wherein the at least one releasable joint is configured to release upon application of fluid pressure in the delivery guide member lumen and further comprising a fluid director slidably located at least partially within the delivery guide member lumen and configured to direct fluid to and to release that selected at least one releasable joint.

12. The device of claim 11 wherein the fluid director is configured to sequentially release more than one releasable joint upon application of fluid pressure in the delivery guide member lumen.

13. The device of claim 6 wherein the at least one releasable joint is configured to release upon application of a suitable DC current to the at least one releasable joint and further comprising an electrical conductor located at least partially within the delivery guide member lumen to supply said suitable DC current to and to thereby release at least one releasable joint.

14. The device of claim 13 wherein the at least one releasable joints and electrical conductors are configured to sequentially release more than one releasable joint.

15. The device of claim 13 wherein the at least one releasable joints and electrical conductors are configured to simultaneously release more than one releasable joint.

16. The device of claim 1 wherein the implant is a stent.

17. The device of claim 16 wherein the stent is unsheathed.

18. The device of claim 1 wherein the implant is an occlusive coil.

19. The device of claim 1 wherein the implant further comprises a therapeutic agent.

20. The device of claim 19 wherein the therapeutic agent is selected from the group consisting of antibiotics, anticoagulants, antifungal agents, anti-inflammatory agents, antineoplastic agents, antithrombotic agents, endothelialization promoting

agents, free radical scavengers, immunosuppressive agents, thrombolytic agents, and combinations thereof.

21. The device of claim 1 wherein the delivery guide further comprises a radioopaque marker.

22. The device of claim 1 wherein the implant exterior surface is smooth after deployment.

23. The device of claim 1 wherein the implant interior surface is smooth after deployment.

24. A guidewire-less implant delivery system comprising:

a.) a noninflatable, elongate delivery guide member having a proximal end and a distal end, said guide member configured to direct at least one implant having an exterior and interior surface to an anatomical treatment site by manipulation by a user,

b.) the at least one implant having a delivery diameter prior to release of the at least one implant and located proximally of the distal end of the delivery guide member prior to release, and

c.) at least one releasable joint configured to maintain at least a section of the at least one implant at the delivery diameter until release of the at least one releasable joint.

25. The system of claim 24 wherein the guide member is closed at its distal end.

26. The system of claim 24 wherein the delivery guide member has a diameter distally and proximally of the at least one implant that is substantially equal to the at least one implant delivery diameter.

27. The system of claim 24 wherein the delivery guide member has no passageway from its proximal to its distal end.

28. The system of claim 24 further comprising an actuator for releasing the at least one releasable joint, and wherein the delivery guide member has only a single passageway from its proximal to its distal end, that passageway contains the actuator, and that actuator does not extend beyond the distal end of the delivery guide member.

29. The system of claim 28 wherein the actuator for releasing the at least one releasable joint is affixed to the distal end of the delivery guide member.

30. The system of claim 24 wherein the at least one implant comprises exactly one implant.

31. The system of claim 24 wherein the at least one implant comprises more than one implant.

32. The system of claim 24 wherein the delivery guide member comprises a distal guide section and a proximal guide section and a gap between the distal guide section and the proximal guide section and the at least one implant is located between the distal guide section and the proximal guide section.

33. The system of claim 24 wherein the delivery guide member has a diameter distally on the proximal guide section and a diameter proximally on the distal guide section, and wherein the at least one implant delivery diameter is substantially equal to the delivery guide member diameter.

34. The system of claim 24 wherein the delivery guide member comprises a tubular member having a lumen.

35. The system of claim 34 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon axial movement within the delivery guide member.

36. The system of claim 35 wherein the actuator is configured to sequentially release more than one releasable joint upon axial movement within the delivery guide member.

37. The system of claim 35 wherein the actuator is configured to simultaneously release more than one releasable joint upon axial movement within the delivery guide member.

38. The system of claim 34 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon rotational movement within the delivery guide member.

39. The system of claim 34 wherein the at least one releasable joint is configured to release upon application of fluid pressure in the delivery guide member lumen and further comprising a fluid director slidably located at least partially within the delivery guide member lumen and configured to direct fluid to and to release that selected at least one releasable joint.

40. The system of claim 39 wherein the fluid director is configured to sequentially release more than one releasable joint upon application of fluid pressure in the delivery guide member lumen.

41. The system of claim 34 wherein the at least one releasable joint is configured to release upon application of a suitable DC current to the at least one releasable joint and further comprising an electrical conductor located at least partially within the delivery guide member lumen to supply said suitable DC current to and to thereby release at least one releasable joint.

42. The system of claim 41 wherein the at least one releasable joints and electrical conductors are configured to sequentially release more than one releasable joint.
43. The system of claim 41 wherein the at least one releasable joints and electrical conductors are configured to simultaneously release more than one releasable joint.
44. The system of claim 24 wherein the implant is a stent.
45. The system of claim 44 wherein the stent is unsheathed.
46. The system of claim 24 wherein the implant is an occlusive coil.
47. The system of claim 24 wherein the implant further comprises a therapeutic agent.
48. The system of claim 47 wherein the therapeutic agent is selected from the group consisting of antibiotics, anticoagulants, antifungal agents, anti-inflammatory agents, antineoplastic agents, antithrombotic agents, endothelialization promoting agents, free radical scavengers, immunosuppressive agents, thrombolytic agents, and combinations thereof.
49. The system of claim 24 wherein the delivery guide further comprises a radioopaque marker.

50. A guidewire-less implant delivery system having flexibility and remote directability comprising:

a.) a noninflatable, elongate delivery guide member having a proximal and a distal end, said guide member configured to direct at least one implant having an exterior and interior surface to an anatomical treatment site by manipulation by a user,

b.) the at least one implant having a delivery diameter prior to release of the at least one implant and located proximally of the distal end of the delivery guide member prior to release,

c.) at least one releasable joint configured to maintain at least a section of the at least one implant at the delivery diameter until release of the at least one releasable joint, and

wherein the remote directability is such that a user may direct the distal end of the guide member into and introduce the at least one implant into a coronary artery solely by manipulation of the delivery guide member from its proximal end.

51. The system of claim 50 wherein the guide member is closed at its distal end.

52. The system of claim 50 wherein the delivery guide member has a diameter distally and proximally of the at least one implant that is substantially equal to the at least one implant delivery diameter.

53. The system of claim 50 wherein the delivery guide member has no passageway from its proximal to its distal end.

54. The system of claim 50 further comprising an actuator for releasing the at least one releasable joint, and wherein the delivery guide member has only a single

passageway from its proximal to its distal end, that passageway contains the actuator, and that actuator does not extend beyond the distal end of the delivery guide member.

55. The system of claim 54 wherein the actuator for releasing the at least one releasable joint is affixed to the distal end of the delivery guide member.

56. The system of claim 50 wherein the at least one implant comprises exactly one implant.

57. The system of claim 50 wherein the at least one implant comprises more than one implant.

58. The system of claim 50 wherein the delivery guide member comprises a distal guide section and a proximal guide section and a gap between the distal guide section and the proximal guide section and the at least one implant is located between the distal guide section and the proximal guide section.

59. The system of claim 50 wherein the delivery guide member has a diameter distally on the proximal guide section and a diameter proximally on the distal guide section, and wherein the at least one implant delivery diameter is substantially equal to the delivery guide member diameter.

60. The system of claim 50 wherein the delivery guide member comprises a tubular member having a lumen.

61. The system of claim 60 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon axial movement within the delivery guide member.

62. The system of claim 61 wherein the actuator is configured to sequentially release more than one releasable joint upon axial movement within the delivery guide member.
63. The system of claim 61 wherein the actuator is configured to simultaneously release more than one releasable joint upon axial movement within the delivery guide member.
64. The system of claim 60 further comprising an actuator slidably located at least partially within the delivery guide member lumen and configured to release at least one releasable joint upon rotational movement within the delivery guide member.
65. The system of claim 60 wherein the at least one releasable joint is configured to release upon application of fluid pressure in the delivery guide member lumen and further comprising a fluid director slidably located at least partially within the delivery guide member lumen and configured to direct fluid to and to release that selected at least one releasable joint.
66. The system of claim 65 wherein the fluid director is configured to sequentially release more than one releasable joint upon application of fluid pressure in the delivery guide member lumen.
67. The system of claim 60 wherein the at least one releasable joint is configured to release upon application of a suitable DC current to the at least one releasable joint and further comprising an electrical conductor located at least partially within the delivery guide member lumen to supply said suitable DC current to and to thereby release at least one releasable joint.

68. The system of claim 67 wherein the at least one releasable joints and electrical conductors are configured to sequentially release more than one releasable joint.

69. The system of claim 67 wherein the at least one releasable joints and electrical conductors are configured to simultaneously release more than one releasable joint.

70. The system of claim 50 wherein the implant is a stent.

71. The system of claim 70 wherein the stent is unsheathed.

72. The system of claim 50 wherein the implant is an occlusive coil.

73. The system of claim 50 wherein the implant further comprises a therapeutic agent.

74. The system of claim 73 wherein the therapeutic agent is selected from the group consisting of antibiotics, anticoagulants, antifungal agents, anti-inflammatory agents, antineoplastic agents, antithrombotic agents, endothelialization promoting agents, free radical scavengers, immunosuppressive agents, thrombolytic agents, and combinations thereof.

75. The system of claim 50 wherein the delivery guide further comprises a radioopaque marker.

76. A system for delivering an implant to a target site in a tubular organ comprising:

- a) the device of any one of claims 1-23; and
- b) a balloon catheter.

77. The system of claim 76 further comprising an embolic filter:

78. The system of claim 77 wherein the embolic filter is attached to the proximal end of the delivery guide.

79. The system of claim 76 wherein the implant is a stent.

80. The system of claim 76 wherein the implant is an occlusive coil.

81. A method for delivering an implant in a subject comprising:

- a) accessing a body region;
- b) advancing the device of any one of claims 1-23 to a target site in the body region; and
- c) releasing the implant at the target site.

82. The method of claim 81 further comprising the step of deploying at least one embolic filter.

83. The method of claim 81 wherein the step of releasing comprises detaching the distal end of the implant from the delivery guide before detaching the proximal end of the implant from the delivery guide.

84. The method of claim 81 wherein the step of releasing comprises a mechanical detachment process.

85. The method of claim 81 wherein the step of releasing comprises a hydraulic detachment process.

86. The method of claim 81 wherein the step of releasing comprises an electrolytic detachment process.

87. The method of claim 81 wherein the body region is a tubular or hollow organ.

88. The method of claim 87 wherein the tubular or hollow organ is selected from the group consisting of blood vessels, arteriovenous malformations, aneurysms, arteriovenous fistulas, cardiac chambers, bile ducts, mammary ducts, fallopian tubes, ureters, large and small airways, stomach, intestines, and bladder.

89. The method of claim 81 wherein the body region is a blood vessel.
90. The method of claim 81 wherein the implant is a stent.
91. The method of claim 81 wherein the implant is an occlusive coil.
92. The method of claim 81 wherein the target site comprises an aneurysm.
93. The method of claim 81 wherein the subject is human.
94. The method of claim 81 wherein the step of accessing is percutaneous.

ABSTRACT OF THE DISCLOSURE

The invention provides an atraumatic, low profile device for the delivery of one or more implants into tubular organs or open regions of the body. The implant delivery device may simultaneously or independently release portions of the implant, e.g., the proximal and distal ends of the implant. This independent release feature allows better implant positioning at the target site. Upon deployment, the implants may be placed at the target site without a sheath.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

DECLARATION (37 CFR 1.63) FOR UTILITY OR DESIGN APPLICATION USING AN APPLICATION DATA SHEET (37 CFR 1.76)

Title of Invention	MULTIPLE JOINT IMPLANT DELIVERY SYSTEMS FOR SEQUENTIALLY-CONTROLLED IMPLANT DEPLOYMENT
---------------------------	--

As the below named inventor(s), I/we declare that:

This declaration is directed to:

- ☒ The attached application, or
☐ Application No. _____ filed on _____
☐ as amended on _____ (if applicable);

I/we believe that I/we am/are the original and first inventor(s) of the subject matter which is claimed and for which a patent is sought;

I/we have reviewed and understand the contents of the above-identified application, including the claims, as amended by any amendment specifically referred to above;

I/we acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me/us to be material to patentability as defined in 37 CFR 1.56, including material information which became available between the filing date of the prior application and the national or PCT International filing date of the continuation-in-part application, if applicable; and.

All statements made herein of my/our own knowledge are true, all statements made herein on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001, and may jeopardize the validity of the application or any patent issuing thereon.

As a named inventor I hereby appoint Practitioners at Customer Number 24353 as my/our attorney(s) or agent(s) to prosecute the application identified above, and to transact all business in the United States Patent and Trademark Office connected therewith

FULL NAME OF INVENTOR(S)

Inventor one: NIKOLCHEV, JULIAN

Signature: [Signature] Citizen of: USA

Inventor two:
Signature: _____ Citizen of: _____

Inventor three:
Signature: _____ Citizen of: _____

Inventor four
Signature: _____ Citizen of: _____

☐ Additional inventors are being named on additional form(s) attached hereto.

Burden Hour Statement: This collection of information is required by 35 U.S.C. 115 and 37 CFR 1.63. The information is used by the public to file (and the PTO to process) an application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This form is estimated to take 1 minute to complete. This time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Inventor(s): Nikolchev, Julian
Title Multiple Joint Implant Delivery Systems
for Sequentially-Controlled Implant Deployment
Serial No.: To Be Assigned
Filing Date: December 24 2003
Attorney Docket: CRMD-002

FIGURE 1A

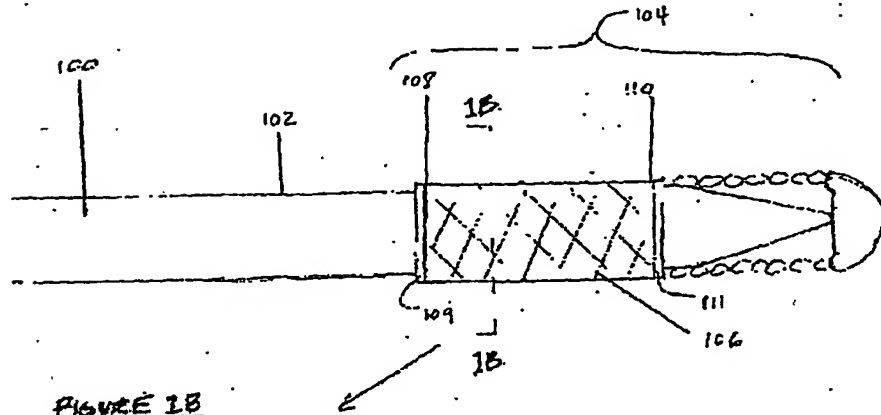


FIGURE 1B





FIGURE 2

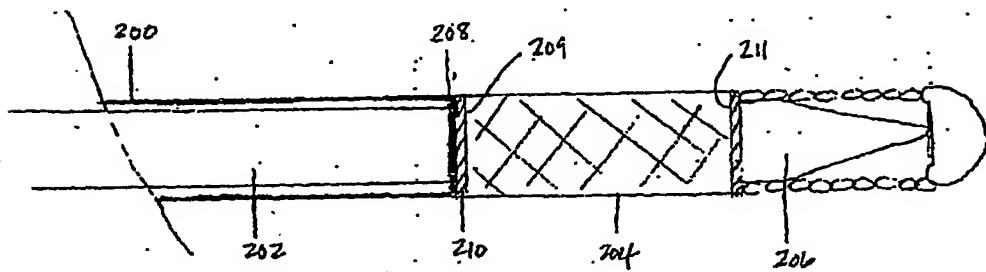

BEST AVAILABLE COPY

FIGURE 3A


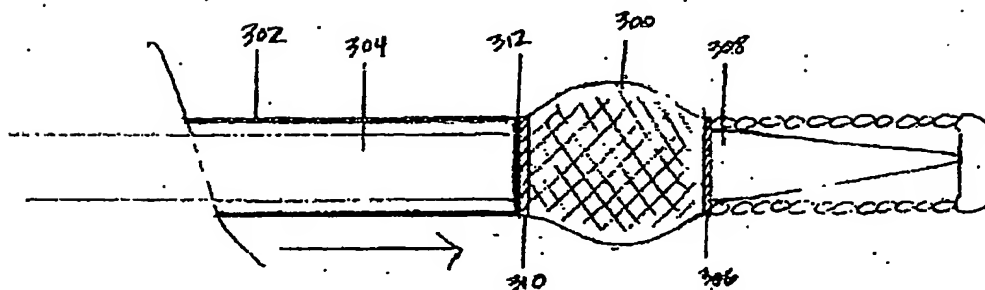


FIGURE 3B

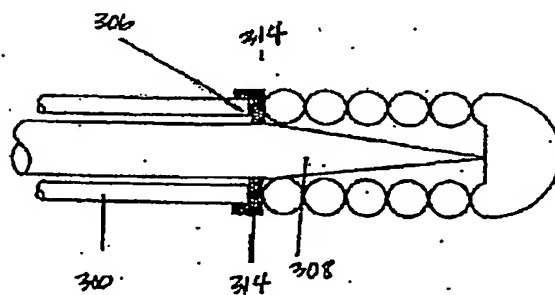

BEST AVAILABLE COPY

Inventor(s): Nikolchev, Julian
 Title Multiple Joint Implant Delivery Systems
 for Sequentially-Controlled Implant Deployment
 Serial No.: To Be Assigned
 Filing Date: December 24 2003
 Attorney Docket: CRMD-002

FIGURE 3C₁



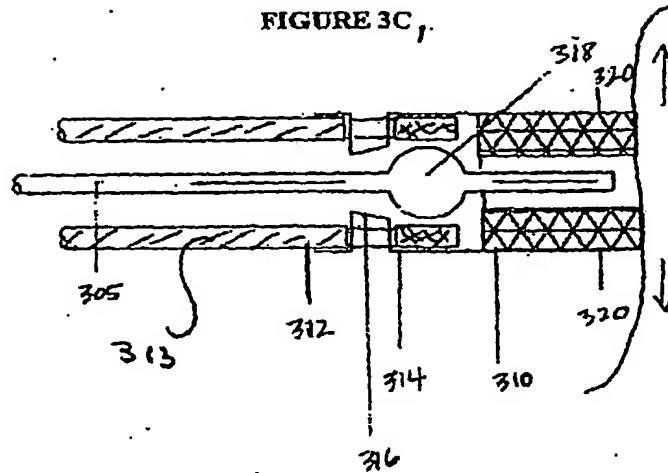




Figure 3C₂

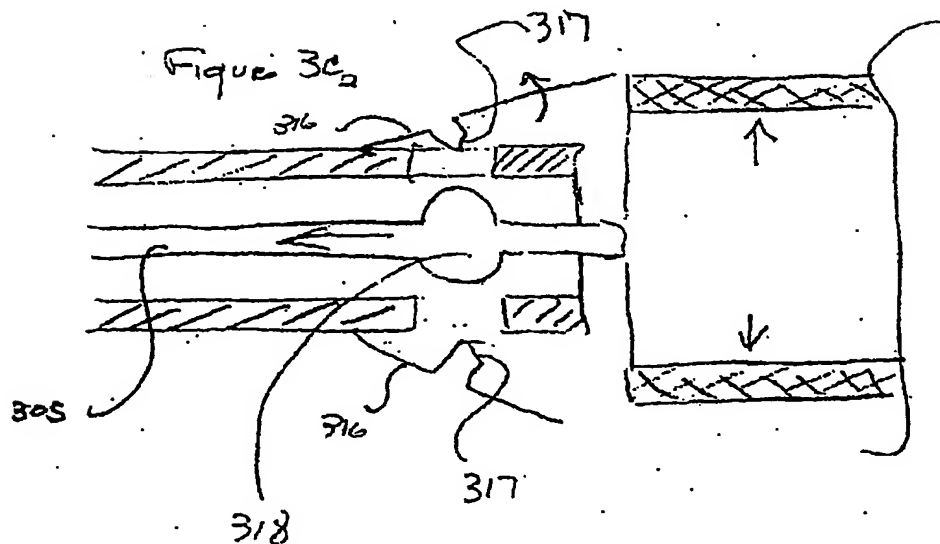





BEST AVAILABLE COPY

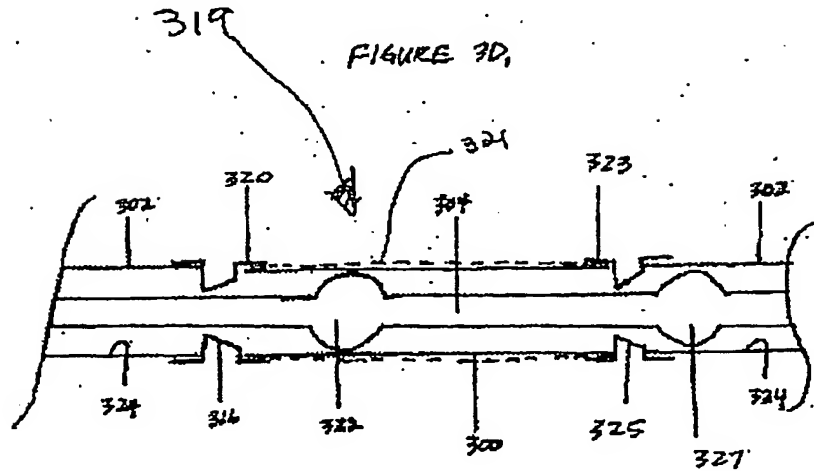



BEST AVAILABLE COPY

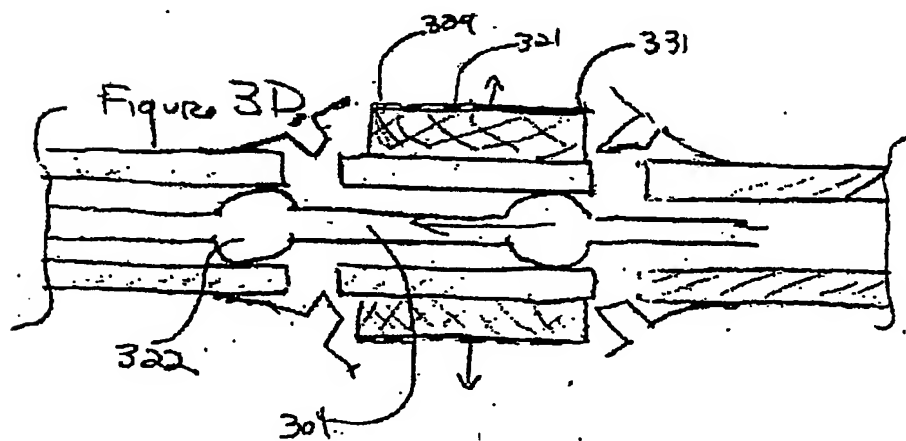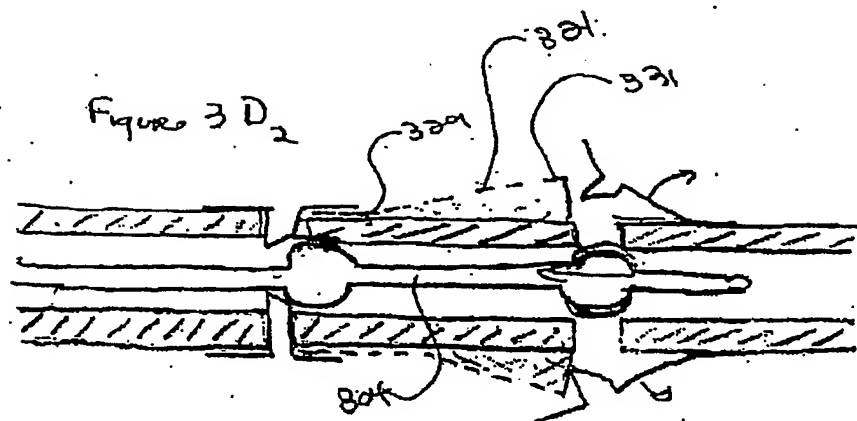

BEST AVAILABLE COPY

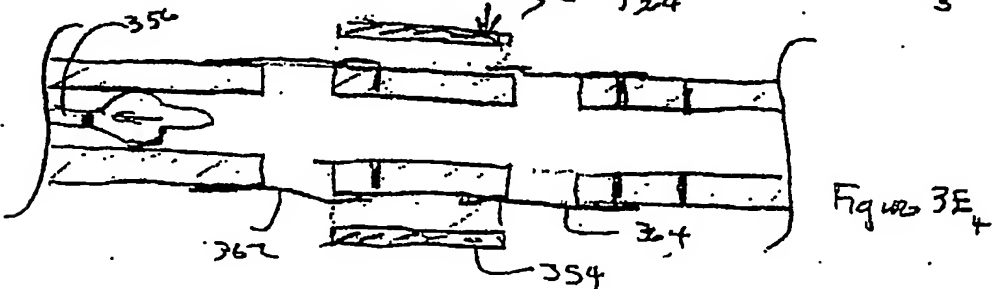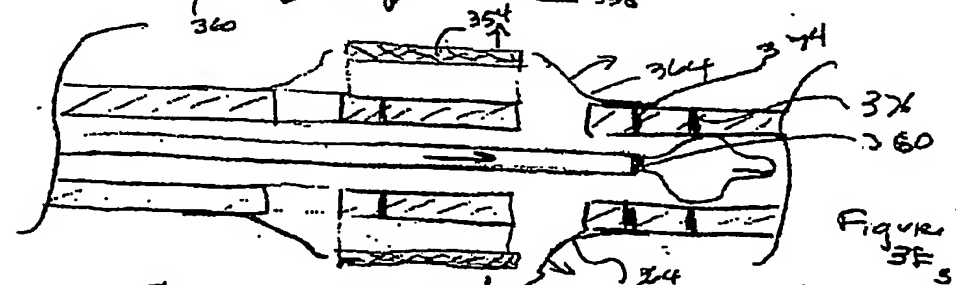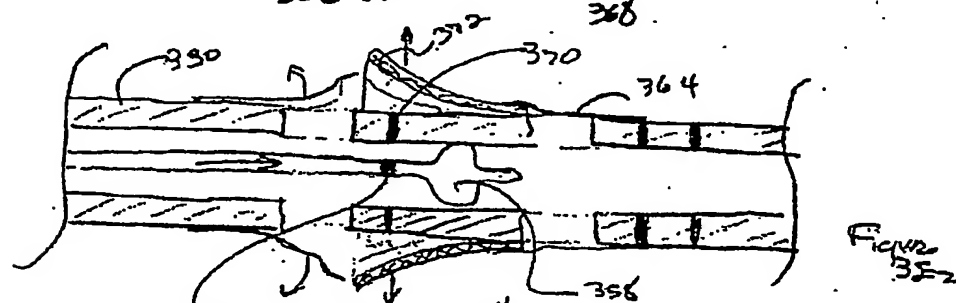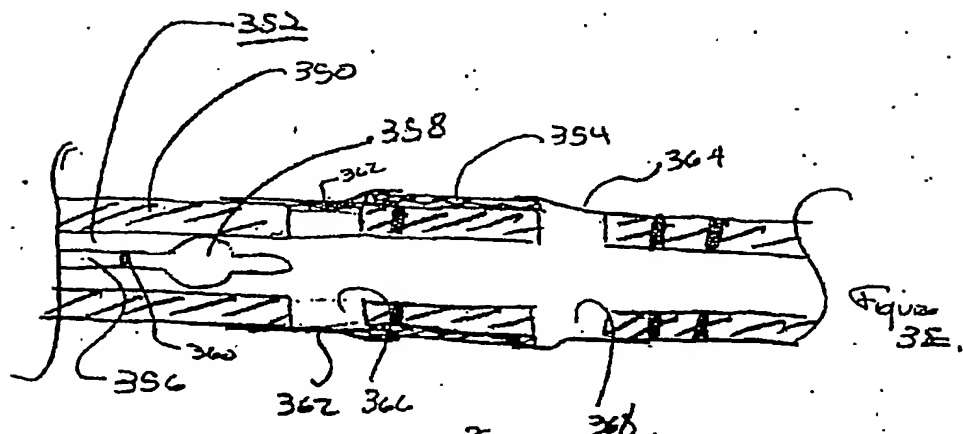

BEST AVAILABLE COPY

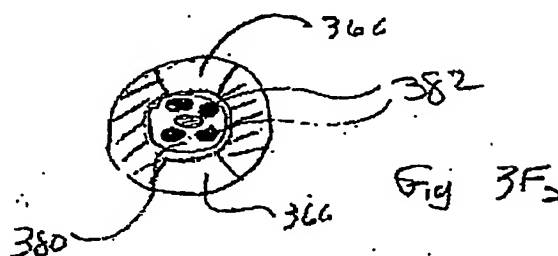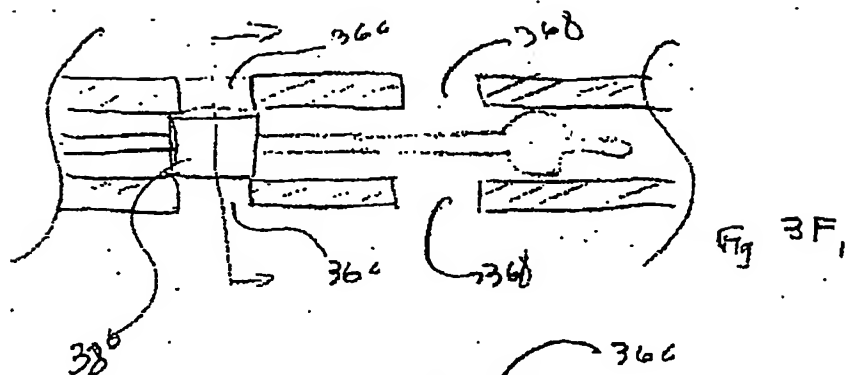

BEST AVAILABLE COPY

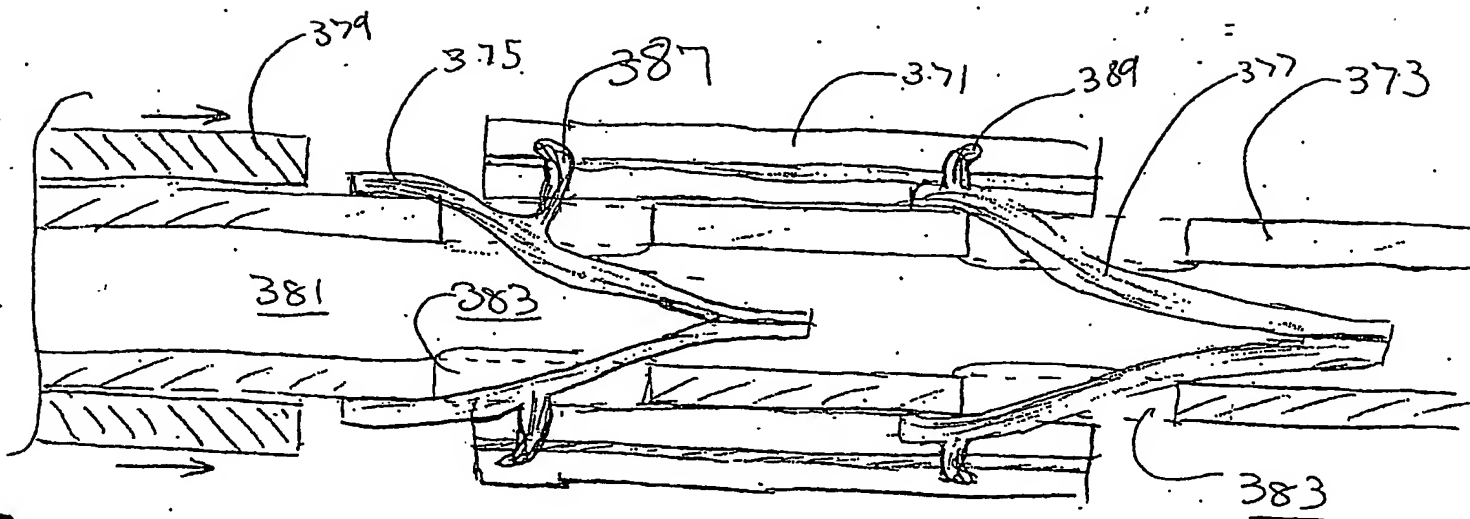


Figure 3G₁

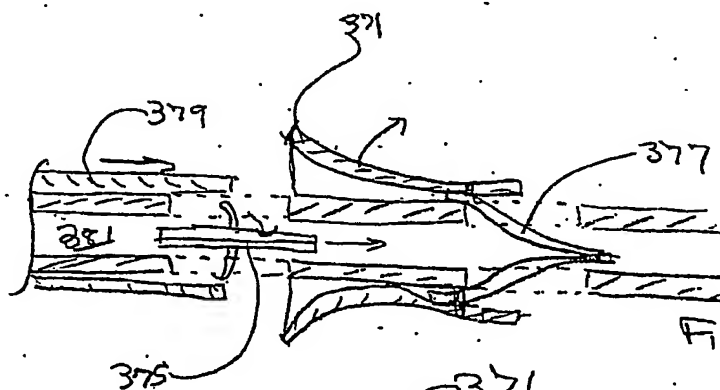


Figure 3G₂


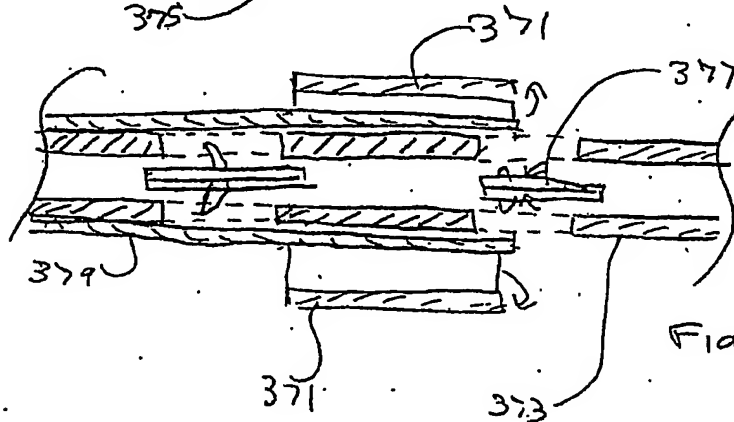





Figure 3G₃

BEST AVAILABLE COPY

FIGURE 4

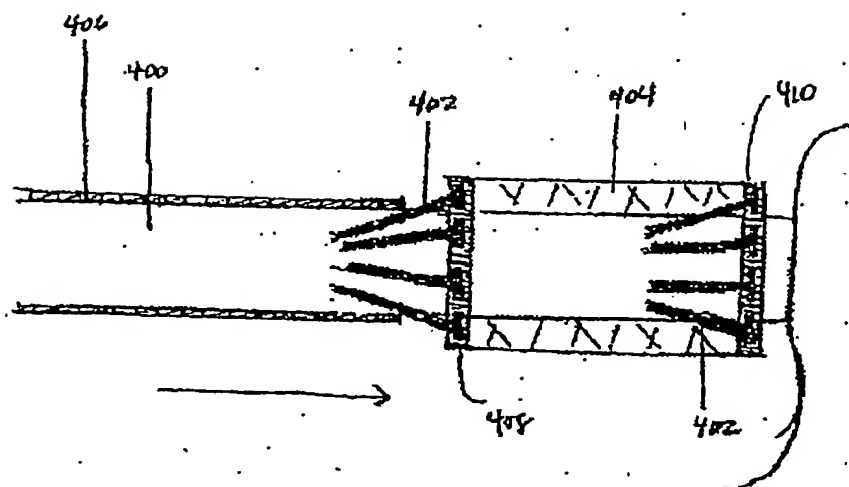

BEST AVAILABLE COPY

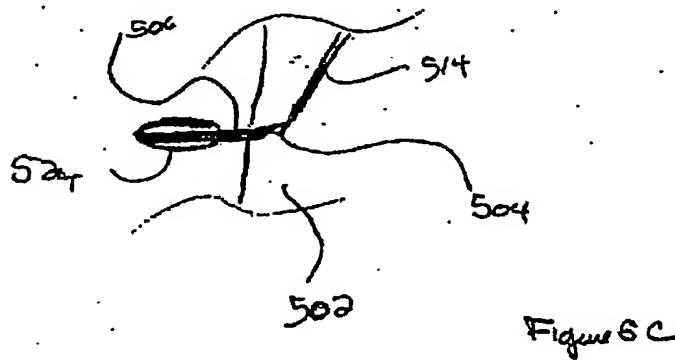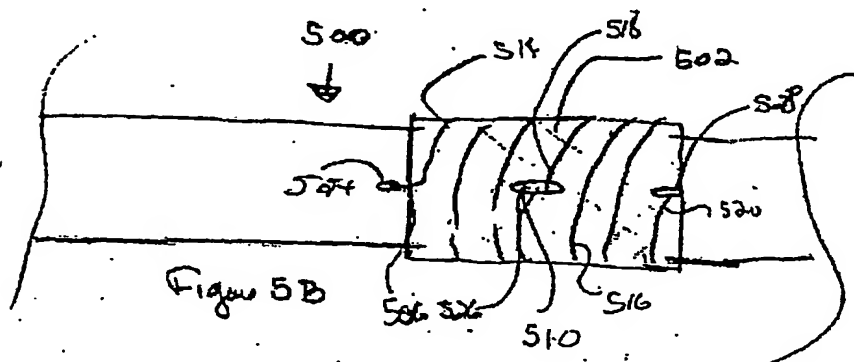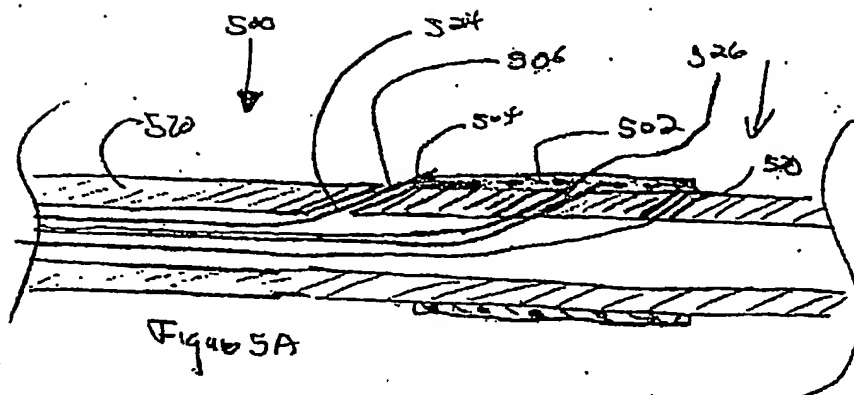

BEST AVAILABLE COPY

Inventor(s): Nikolchev, Julian
Title Multiple Joint Implant Delivery Systems
for Sequentially-Controlled Implant Deployment
Serial No.: To Be Assigned
Filing Date: December 24 2003
Attorney Docket: CRMD-002

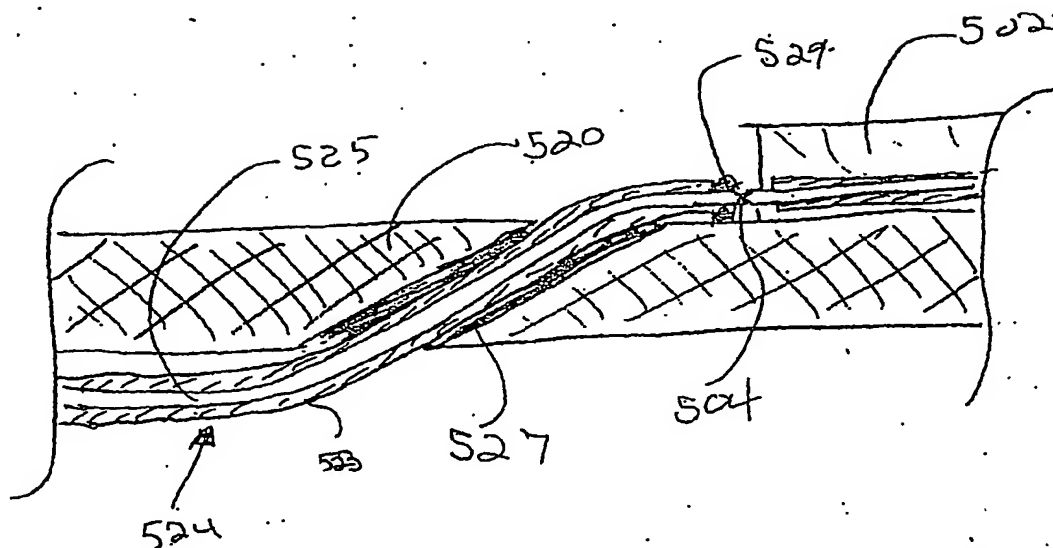


Figure 5D

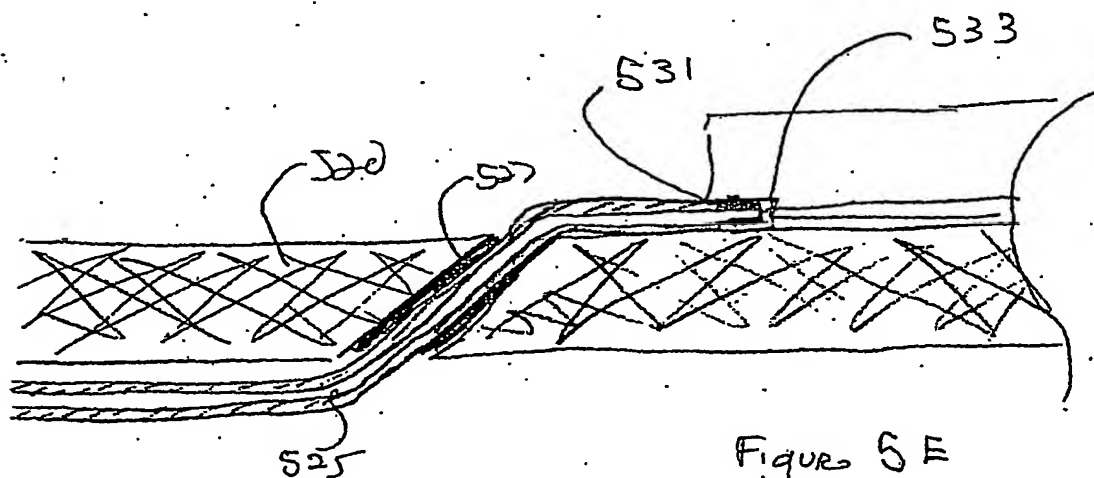


Figure 5E

BEST AVAILABLE COPY

FIGURE 6A


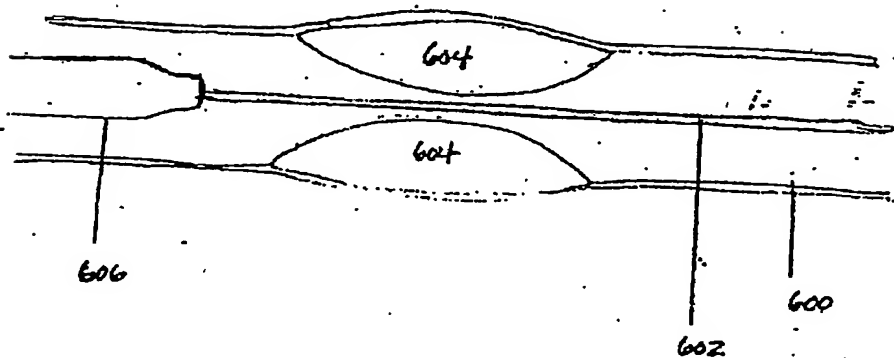


FIGURE 6B

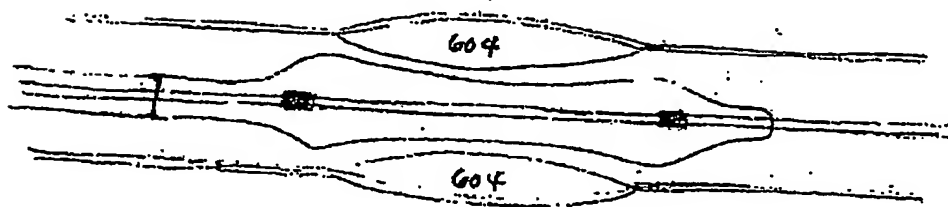

BEST AVAILABLE COPY

FIGURE 6C


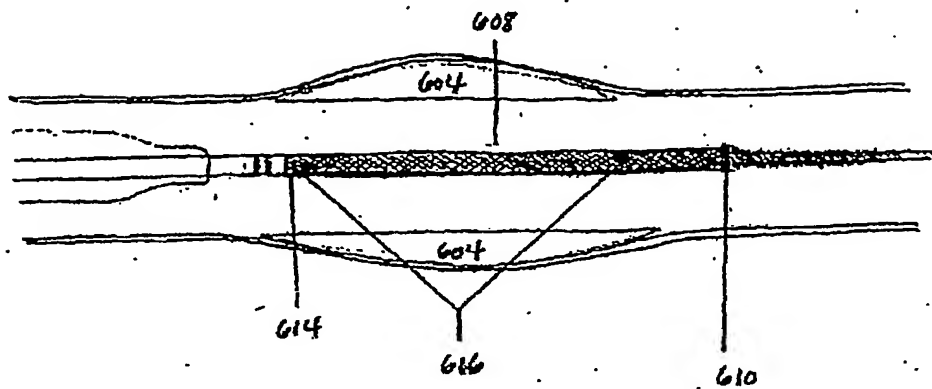


FIGURE 6D

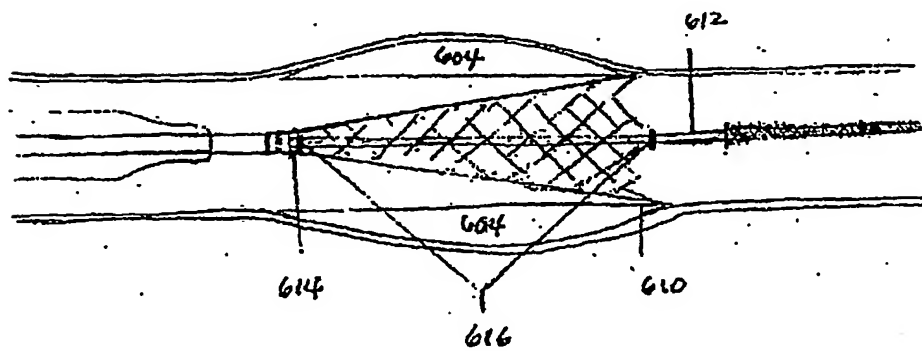

BEST AVAILABLE COPY